




ASAHI OPTICS


*Innovative
in LED optical Engineering
and Manufacturing Services*


 +86 18928483413


 +86 18928483413


 SKYPE: ASAHI-OPTICS

 TEL:+86-755-85241681

 FAX:+86-755-85241681-0

 E-MAIL: optics@asahi-optics.com

 Web: www.asahi-optics.com

 8F Yueshang Chanye Building, No.1 of TangKeng LuKou Dong
GuanTian, Bao'Shi Dong Road,Shiyan,Bao'an,Shenzhen 518108



CATALOG 



COMPANY PROFILE



In the year 2005, the ASAHI Group Factory was established in China for the production of plastic parts, As the 1st non-Japanese enterprise to be able to enter the Japanese Market for producing plastic housing parts. Major business is plastic housing parts for mobile phones, computers, cameras etc. Main customers: Sony,Sharp,NEX,Nikon,Black berry,Panasonic etc.

In the year 2008, Successfully entered and maintained a long stable business in European and North American markets for plastic housing parts and optical lenses over the past years.

In the year 2010, Established the independent business unit of Asahi Optics Limited focused on LED optics products and providing an integrated one-stop service including optical design, tooling design, tooling making, precision injection, and sales.

Asahi Optics became a well-known manufacturer of precision plastic and optical molds in China. We are listed as a national high-tech enterprise and cooperate with LED brands such as CREE, CITIZEN, OSRAM, LUMILEDS, NICHIA, and SAMSUNG LEDs in the area of optical engineering and technology development.


Products are being used in a wide range of areas, Indoor Lighting (commercial linear light, down light, TV backlight, ceiling panel light, etc.), Outdoor lighting(street light, high bay light, landscape architecture light, billboard light, Tunnel light, Stadium sport light, etc.) as well as the other field special optics.

The precision-engineered Asahi Optics design has received many national invention patents and utility model patents which compete and win global market shares.

We continuously produce leading technologies and quality products that have won praise from our loyal customers.



ASAHI OPTICS LIMITED

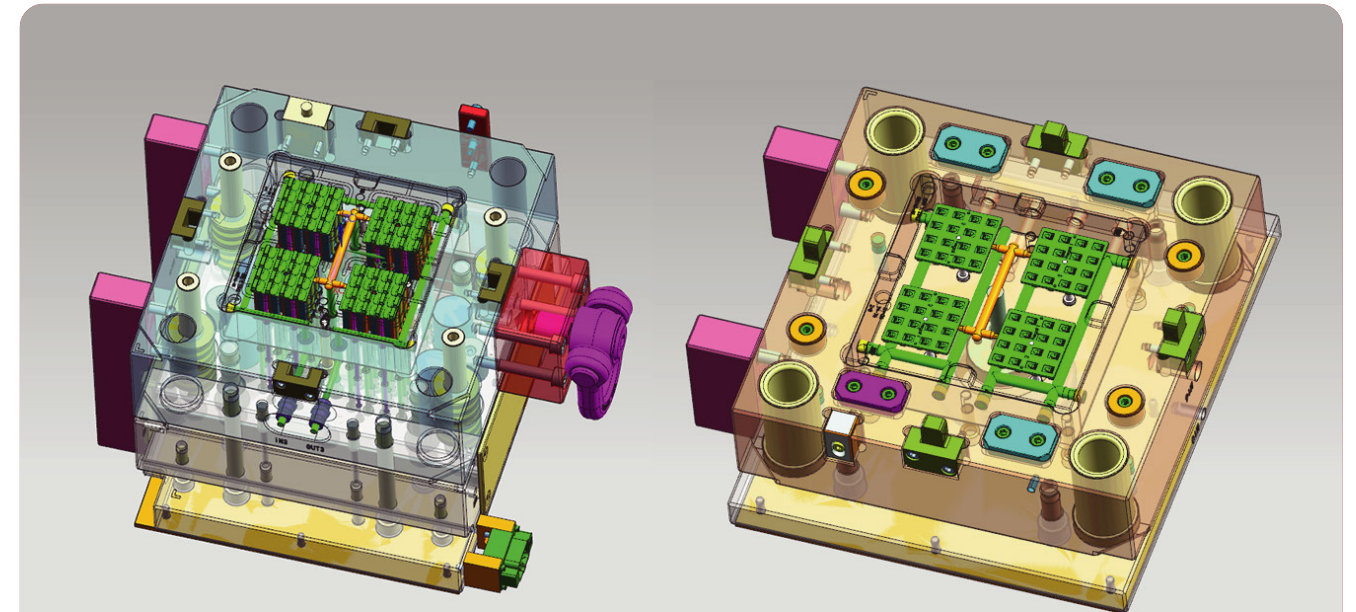



COMPANY MILESTONE

2005
year

We are established

Factory established in China in production of plastic parts.
1st non-Japanese owned enterprise to be able to enter the Japanese Market for producing plastics housing parts.
Major business is plastic housing parts for mobile phone, computer, camera Etc. Main customers : Sony, Sharp, NEC, Nikon, Black berry, Panasonic etc.

Successfully entered and maintained long stable business in European and North American Market for plastic housing parts and optical lens over the past years.




2008
year

2010
year



Established the independent business unit of Asahi Optics Limited focused on LED optics products and providing an integrated one-stop service including optical design, tooling design, tooling making, precision injection, and sales.

Asahi Optics became a well-known manufacturer of precision plastic and optical molds in China. We are listed as a national high-tech enterprise and cooperate with LED brands

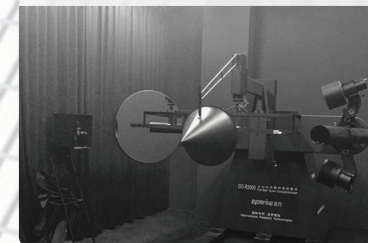


2014
year

2015
2023
year



Obtained ISO9001, IATF 16949 and National Hi-tech Certifications and expanded the product to the automotive field. Evolved and expanded to a well recognized OEM/ODM in being a precision optics solution provider.

PRODUCT APPLICATION

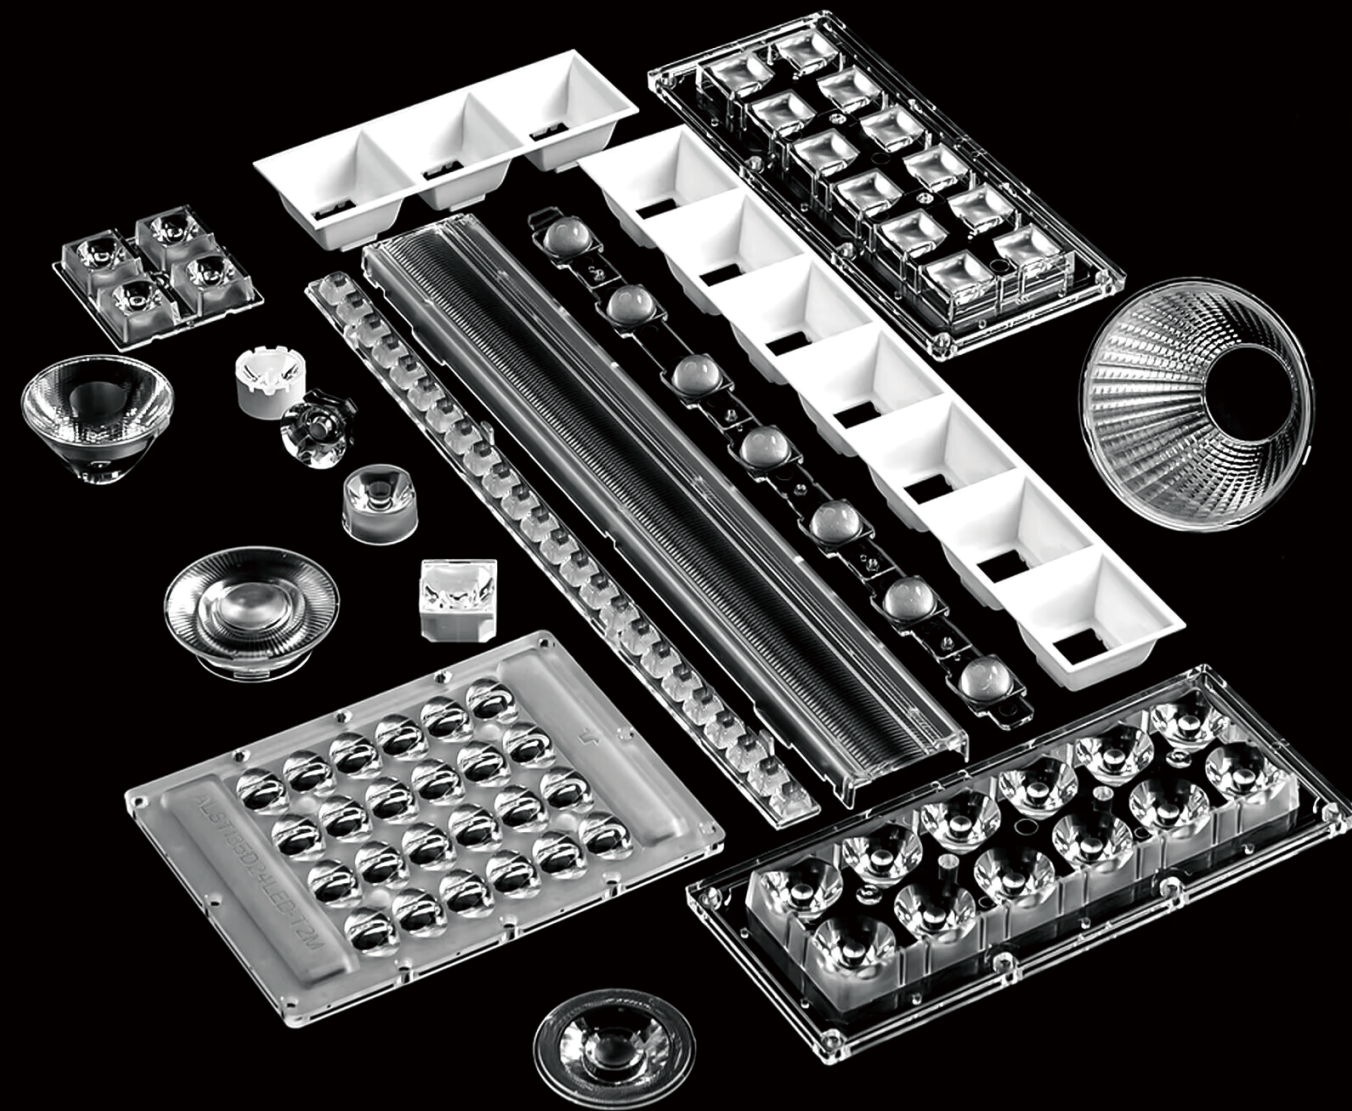

STREET & AREA LIGHTING

THE NORTH AMERICAN ROAD LIGHTING STANDARDS IES CLASSIFICATION—LED LENS SERIES TYPE II, TYPE III, TYPE IV, AND TYPE V ARE WIDELY USED FOR STREET LIGHTING AND OUTDOOR LIGHTING REQUIREMENTS.

THE OPTICAL LIGHT DISTRIBUTION DESIGNED BY ASAHI OPTICS HAS BEEN OPTIMIZED AND COMBINED WITH THE ROAD STANDARDS OF EUROPEAN AND AMERICAN COUNTRIES, WHICH CAN ACHIEVE THE HEIGHT DISTANCE OF THE ROAD WITH THE HEIGHT RATIO OF 6:1 AND LESS BACKLIGHT OF THE ROAD, THE $UI > 0.8$, $U0$ INDEX CAN REACH THE STANDARD OF ME4A.

FLEXIBLE LENS MODULE SIZE COMPATIBLE WITH DIFFERENT LED SIZES TO MEET THE POWER REQUIREMENTS OF



APPLICATION PRODUCTS



STREET LIGHT



FLOOD LIGHT



URBAN LIGHT



INDUSTRIAL LIGHT

STREET LIGHT LENS

COMPATIBILITY


■ UP TO SIZE OF "3030" "3535" "5050" "7070" LEDS PACKAGE

APPLICATION:


■ THE 2X2 LENS MODULES WITH STANDARDIZED SQUARE-SHAPED (50X50 MM) FOOTPRINT AND COMMON LED POSITIONING AMONGST

FEATURE:


■ THE 2X2 LENS MODULES KEEP DEVELOPING THE NEW OPTICAL DIAGRAM CUSTOMERS CAN REST ASSURED THAT UMINAIRES WILL




20°




40°




60°




90°




40X110°




90X120°




T2




T2M-CUTOFF




T2M-A




T2M-D




T3




T3M




T4



T4S



T5R




P45°



2X2 LENS 50MM
PMMA/PC | 5050LED

MODEL	BEAM ANGLE
ALST50D4LED5050T8060G	80°x60°
ALST50D4LED5050T12060G	120°x60°
ALST50D4LED5050T3M	T3M
ALST50D4LED5050MEW	T4-Very Short
ALST50D4LED5050T4B	T4-Very Short
ALST50D4LED5050TF-FS	T4-Very Short
ALST50D4LEDT5Q	T5
ALST50D4LEDT5R	T5 Round beam

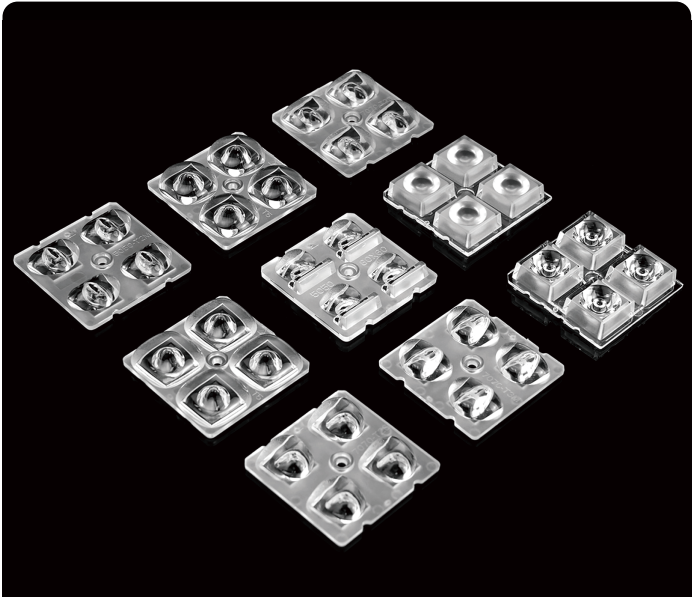


2X2 LENS 50MM
PMMA/PC | 3535 / 5050LED

MODEL	BEAM ANGLE
ALHB50D4LED3535T10G	10°
ALHB50D4LED3535T30G	30°
ALHB50D4LED3535T60G	60°
ALHB50D4LED5050T30G	30°
ALHB50D4LED5050T60G	60°
ALHB50D4LED5050T90G	90°
ALHB50D4LED5050T120G	120°
ALST50D4LED5050T2M	T2M
ALST50D4LEDT2NB	T2NB
ALST50D4LEDT2WB	T2WB
ARST43D4LED5050T2M-cutoff	T2M-cutoff
ARST50D4LED5050T2M-cutoff	T2M-cutoff




2X2 IP LENS 5050LED 50MM
PMMA/PC | 5050LED

MODEL	BEAM ANGLE
ALHB50D4LED15110G	15X110°
ALST50D4LEDT1M	T1
AJST50D4LEDME1	T2
AJST50D4LEDT2M-IP	T2
ALST50D4LED5050T2M-L-2S	T2M-L
ALST50D4LED5050T2M-L	T2M-L

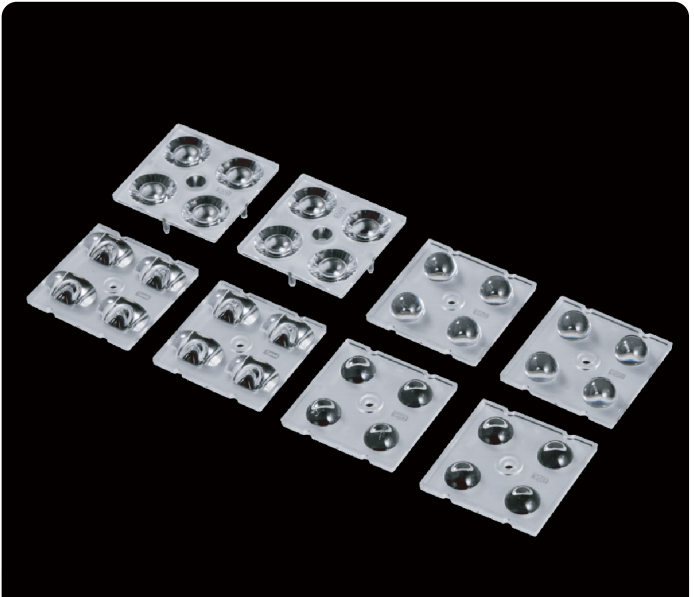

2X2LENS 7070LED 50MM
PMMA/PC | 7070LED


MODEL	BEAM ANGLE
AJHB50D4LED7070T30G	30°
AJHB50D4LED7070T60G	60°
AJHB50D4LED7070T90G	90°
AJST50D4LED7070T2	T2
ALST50D4LED7070T2S	T2S
ALST50D4LED7070T2VS	T2-Very Short
ALST50D4LED7070T3M	T3M

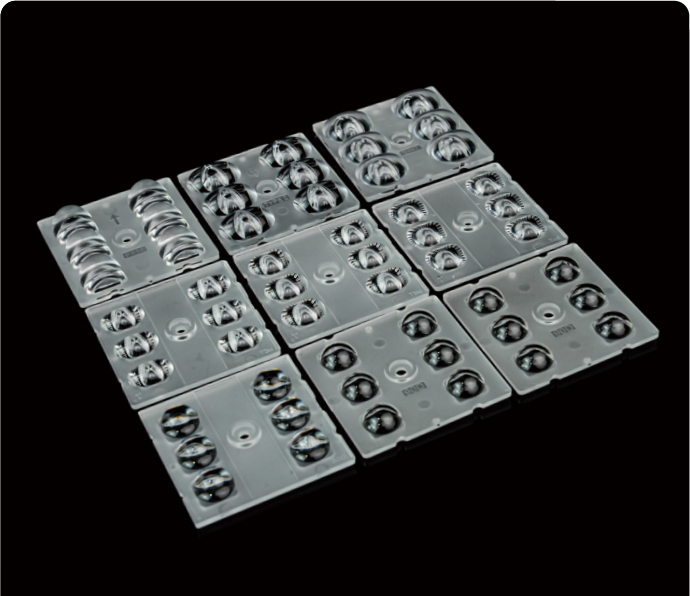

2X3 LENS 50MM

PMMA/PC | 5050LED

MODEL	BEAM ANGLE
AJHB50D6LED30G-3S	30°
AJHB50D6LED60G-3S	60°
AJHB50D6LED90G-3S	90°
AJST50D6LEDT2M-3S	T2M
ARST50D6LED5050T2M-Cutoff-3S	T2M-Cutoff
AJST50D6LEDT3M-3S	T3M
AJST50D6LEDT4S-3S	T4S
AJSP50D6LEDP45G-3S	P45°

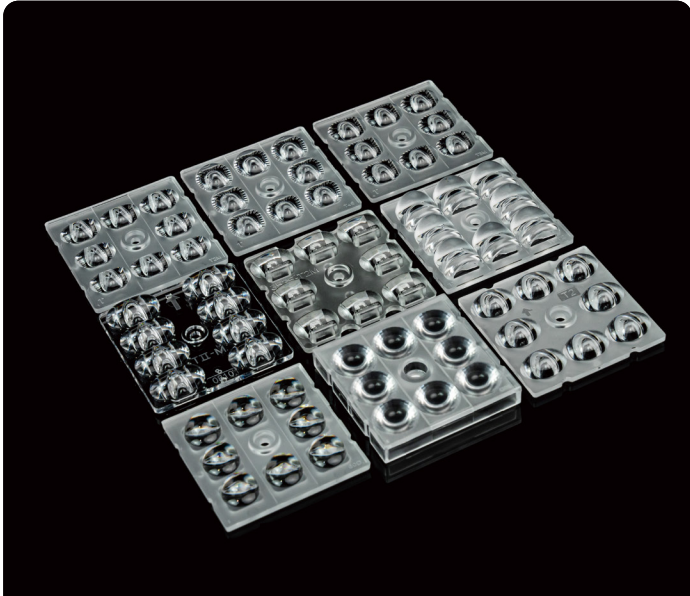

8 LED LENS 50MM

PMMA/PC | 5050LED


MODEL	BEAM ANGLE
AJHB50D8LED30G	30°
AJHB50D8LED60G	60°
AJHB50D8LED90G	90°
AJST50D8LEDT2M	T2M
ARST50D8LED5050T2M-Cutoff	T2M-Cutoff
AJST50D8LEDT3M	T3M
AJST50D8LEDT4S	T4S
AJSP50D8LEDP45G	P45°



10LED LENS 5050LED 50MM

PMMA/PC | 5050LED

MODEL	BEAM ANGLE
AJST50D10LEDT2M-CUTOFF	T2M

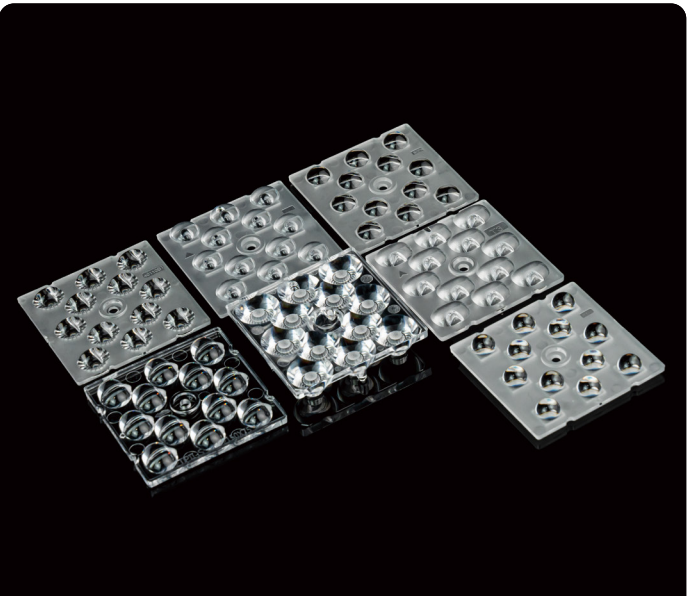

12 LED LENS 50MM

PMMA/PC | 2835 / 3030LED


MODEL	BEAM ANGLE
AJHB50D12LED15G	15°
AJHB50D12LED60G	60°
AJHB50D12LED90G	90°
AJST50D12LED40X110°	40X110°
AJST50D12LEDT2	T2
AJST50D12LEDT3	T3
AJST50D12LEDT4	T4



16 LED LENS 50MM

PMMA/PC | 2835 / 3030LED

MODEL	BEAM ANGLE
ALHB50D16LED20G	20°
ALHB50D16LED40G	40°
ALHB50D16LED60G	60°
ALHB50D16LED90G	90°
AJHB50D16LED40110G	40X110°
AJHB50D16LED90120G	90X120°
AJSP50D16LEDP45G	P45°
AJST50D16LEDT2	T2
ALST50D16LEDT2M-A	T2M-A
ALST50D16LEDT2M-D	T2M-D
AJST50D16LEDT3	T3
ALST50D16LEDT3M	T3M
AJST50D16LEDT4	T4
ALST50D16LEDT4S	T4S
AJST50D16LEDT5	T5

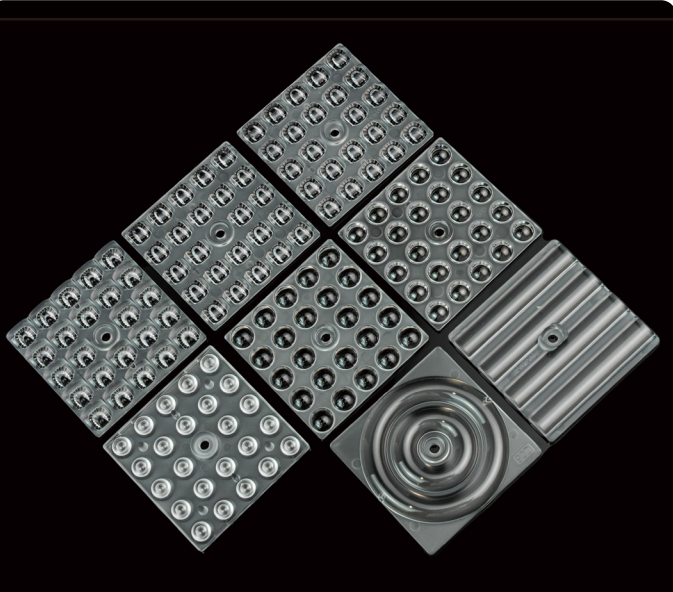

50MM 24 LED LENS

PC | 2835 / 3030LED

MODEL	BEAM ANGLE
AJHB50D24LED25G	25°
AJHB50D24LED60G	60°
AJHB50D24LED90G	90°
AJHB50DXXLED60120G	60X120°
AJHB50DXXLED90120G	90X120°
AJST50D24LEDT2	T2
AJST50D24LEDT3	T3
AJHB50DXXLEDT3	T3
AJST50D24LEDT4	T4



STREET LIGHT LENS

COMPATIBILITY


■ "3535"LED, "5050"LED

APPLICATION:


■ The 2x6 and 3X8 lens modular family with a wide variety of different beams,suitable for both outdoor and indoor lighting

FEATURE:


■ High efficiency by PMMA& PC material and luminance uniformity
IK08 test for PMMA material, IK10 test for PC material
Compatible with vertical and horizontal installation.
ZHAGA-standard assembly
IP66 protection & high temperature resistance.




8°




30°




60°




90°




120°




30x90°




T2M




T2M-3535




T2M-CUTOFF




T2M-Cutoff




T2WB




T2NB




T2M-L



T3M




T3M-3535



T5

2X6 LENS IP66 173MM

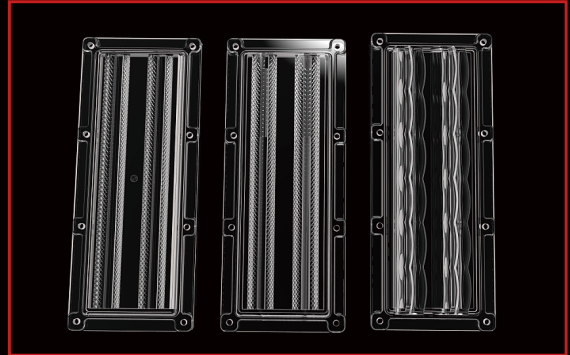

MODEL	BEAM ANGLE	MATERIAL	LED TYPE
ALHB173D12LED8G	8°	PMMA	3535LED
ALHB173D12LED30G	30°	PC	3535 / 5050LED
ALHB173D12LED60G	60°	PC/PMMA	5050LED
ALHB173D12LED90G	90°	PC/PMMA	5050LED
ALHB173DXXLEDT60G	60°	PC	2835 / 3030 / 5050LED
ALHB173DXXLEDT90G	90°	PC	2835 / 3030 / 5050LED
ALST173D12LED3535T2M	T2M	PMMA	3535LED
ALST173D12LED3535T2M-H	T2M-H	PMMA	3535LED
ALST173D12LED5050T2M	T2M	PMMA	5050LED
ALST173D12LED5050T2M-cutoff	T2M-Cutoff	PC/PMMA	5050LED
ALST173D12LEDT2NB	T2NB	PMMA	3535 / 5050LED
ALST173D12LEDT2NB-H	T2NB-H	PC	3535 / 5050LED
ALST173D12LEDT2WB	T2WB	PMMA	3535 / 5050LED
ALST173D12LEDT2WB-H	T2WB-H	PMMA	3535 / 5050LED
ALST173D12LED5050T2M-L	T2M-L	PC	5050LED
ALST173D12LED3535T3M	T3M	PMMA	3535LED
ALST173D12LED5050T3M	T3M	PC/PMMA	5050LED
ALST173D12LED5050T3M-H	T3M-H	PC/PMMA	5050LED
AJST173D12LEDT4B	T4	PC	5050LED
ALST173D12LEDT5	T5	PC	3535 / 5050LED
ASL173DXXLEDDA25G	DA25D°	PC	2835/3030LED



3X8 LENS IP66 173MM
PMMA/PC | 5050LED

MODEL	BEAM ANGLE
ALHB173D24LED30G	30°
ALHB173D24LED3090G	30x90°
ALHB173D24LED60G	60°
ALHB173D24LED90G	90°
ALHB173D24LED120G	120°
ALHB173DXXLED120G	120°
ALST173D24LEDT2M	T2M
ALST173D24LEDT5	T5



T STREET & AREA LIGHT LENS

COMPATIBILITY


4pieces of "3030"LEDs; "5050" LEDs package

APPLICATION:


IP66 water-proof for Industrial high bay lighting
T2M-cutoff for street lighting
Warehouse,Horticulture, gas station, all of other Indoor and Outdoor Areas etc.

FEATURE:


The 4x6 modular high power Lens Module with IP66 Silicon Gasket Protection
High-temperature resistance and IK08 test standard




30°




60°




90°




30x90°



80x140°




T2M-CUTOFF

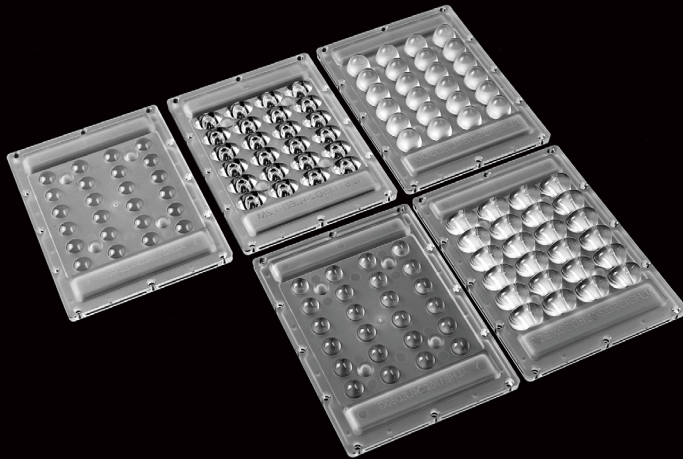

4X6LED LENS IP66 135MM

PC | 5050LED

MODEL	BEAM ANGLE
ALHB135D24LED30G	30°
ALST135D24LED3090G	30x90°
ALHB135D24LED60G	60°
ALHB135D24LED90G	90°
ALST135D24LEDT2M-CUTOFF	T2M-CUTOFF

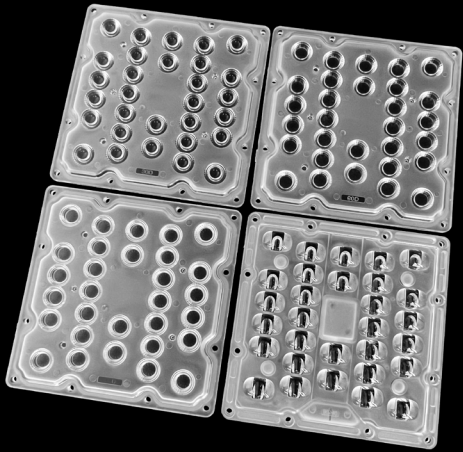

30 LED LENS IP66 130MM

PC | 5050LED

MODEL	BEAM ANGLE
AJHB130D30LED30G	30°
AJHB130D30LED60G	60°
AJST130D30LED80140G	80x140°
AJHB130D30LED90G	90°

STREET & AREA LIGHT LENS

COMPATIBILITY


■ "2835" "3030" "5050" LEDs package

APPLICATION:


■ IP66 gasket water-proof application
Billboards,Industrial Area, Railway Stations,Stadium, Parking lot
Tunnels, Other Indoor and Outdoor Areas etc.

FEATURE:


■ High Power Outdoor IP Waterproof 66 Module , Optimized optical design with high light intensity, and good durability of lens life time




15°




30°




40x110°




45°




60°




60x90°




70°




75x150°




80x150°




90°




90x120°




90x110°




120°




130°




T2




T3



T4S



T5

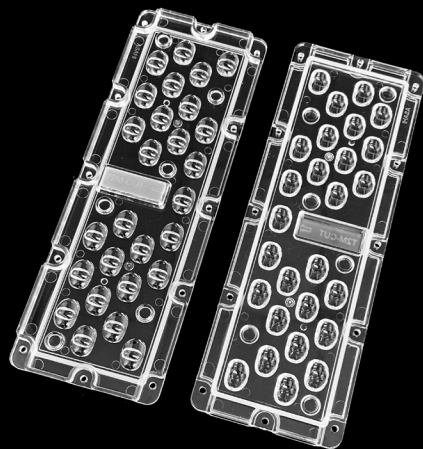

27LED LENS IP66 220X78MM

PC | 5050LED


MODEL	BEAM ANGLE
ALST27LED5050T2M-CUTOFF	T2M-CUTOFF



28 LED LENS IP66 236MM

PC | 5050LED


MODEL	BEAM ANGLE
ARHB236D28LEDT30	30°
ARHB236D28LEDT60	60°
ARHB236D28LEDT90	90°
ARHB236D28LEDT2M-CUTOFF	T2M-CUTOFF

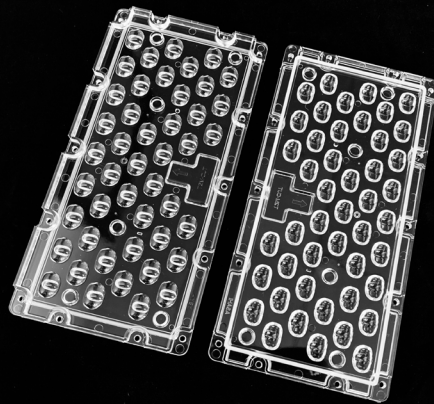

46LED LENS IP66 220X110MM

PC | 5050LED

MODEL	BEAM ANGLE
ALST46LED5050T2M-CUTOFF	T2M-CUTOFF

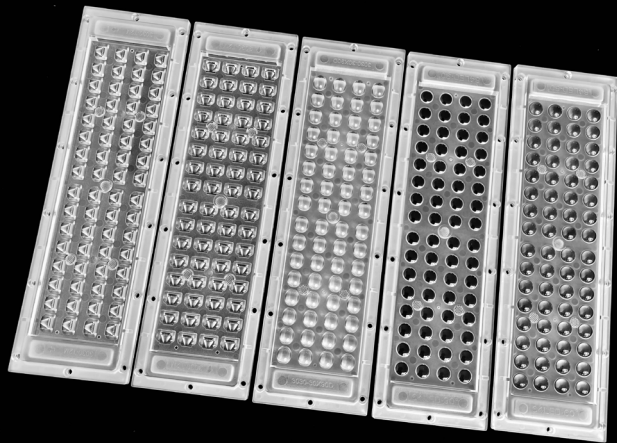

64LED LENS IP66 255MM

PC | 3030LED

MODEL	BEAM ANGLE
ALHB255D64LED3090G	30x90°
ALHB255D64LED60G	60°
ALHB255D64LED90G	90°
ALST255D64LEDT2M-H	T2M-H
ALST255D64LEDT2M-V	T2M-V

STREET & AREA LIGHT LENS

COMPATIBILITY


■ Up to size of "5050" LEDs package

APPLICATION:


■ IP66 gasket water-proof application
Widely used in schools, airports, docks and ports, stadiums, community playgrounds, building squares, high-speed pole lights, etc.

FEATURE:


■ Wide range of beam angles and high power lumen modules can be used for different requirements applications.
Anti-Glare, UGR Control, Bright Without Glare




30°




60°




90°




60x90°



70x160°



75x140°



80x150°



STREET & FLOOD LIGHT LENS

COMPATIBILITY


Up to size of "2835" "3030" "5050" LEDs package

APPLICATION:


IP66 gasket water-proof application
Billboards, Industrial Area, Railway Stations, Stadium, Parking lot
Tunnels, Other Indoor and Outdoor Areas etc.

FEATURE:


Multiple distribution curves can be used for various applications
Anti-Glare, UGR Control, Bright Without Glare
The Precision-engineered optics aim light on site, reducing spillage and reducing wasted light and complaints from neigh-




40X110°




4H4V




6H6V




T2




T3



T4




T5

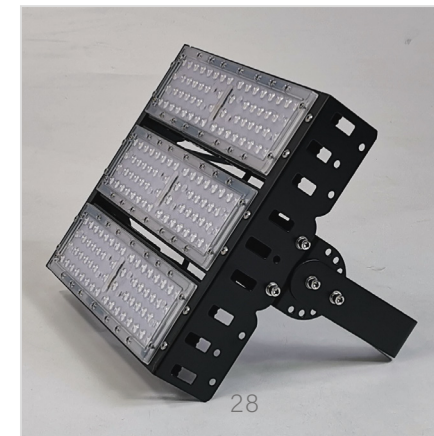




72 LED LENS IP66 250X74MM
PC | 2835 / 3030LED

MODEL	BEAM ANGLE
AJHB25072LED60G	60°
AJHB25072LED80150G	80X150°
AJHB25072LED90G	90°

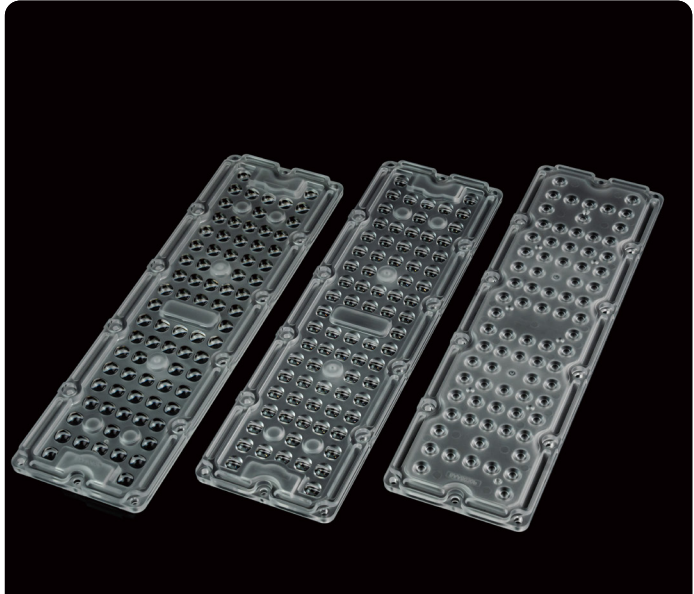


80 LED LENS IP66 236X70MM
PC | 2835 / 3030LED

MODEL	BEAM ANGLE
AJHB236D80LED30G	30°
AJHB236D80LED3090G	30X90°
AJHB236D80LED60G	60°
AJHB236D80LED6090G	60X90°
AJST236D80LED75140G	75X140°
AJHB236D80LED90G	90°

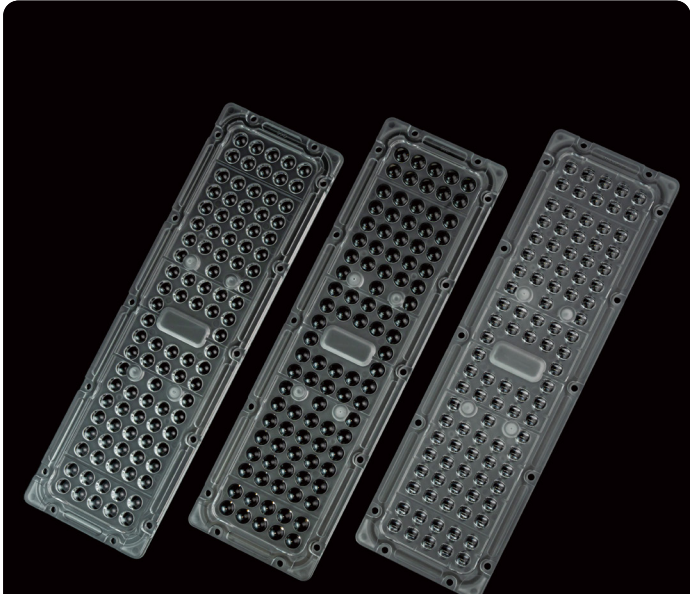

90 LED LENS IP66 250X74MM
PC | 2835 / 3030LED

MODEL	BEAM ANGLE
AJHB250D90LED60G	60°
AJHB250D90LED80150G	80X150°
AJHB250D90LED90G	90°

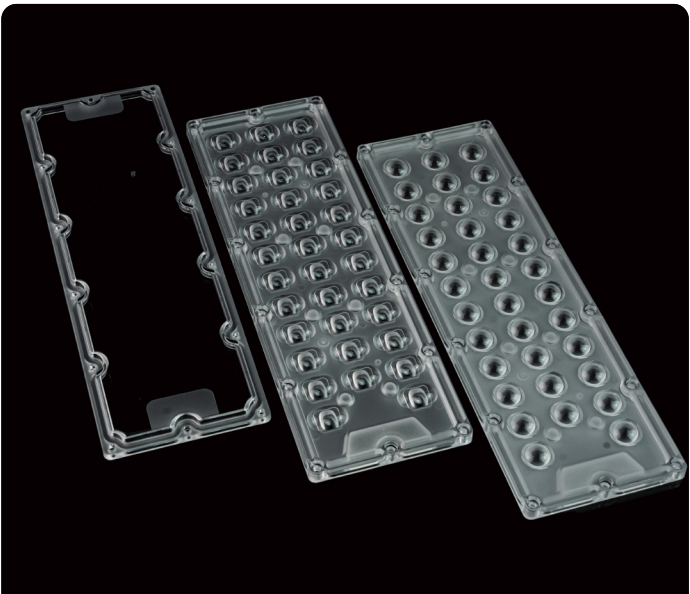

35 LED LENS IP66 275X90MM
PMMA/PC | 5050LED

MODEL	BEAM ANGLE
AJHB275D35LED40110G	40x110°
AJST275D35LEDT2	T2
AJST275D35LEDT3	T3
AJST275D35LEDT4	T4
AJST275D35LEDT5	T5

SPORT LIGHT LENS

COMPATIBILITY


■ Up to size of "2835" "3030" "3535" "5050" LEDs package


APPLICATION:

■ Widely used in schools, airports, docks and ports, stadiums(foot-ball,soccer matches), community playgrounds, building squares, high-speed pole lights, etc.

FEATURE:


■ The precision- engineered optics of polarized light aim light directly onto the field of play, to shine uniformly and to minimize glare. Outdoor venues benefit from spill light control, no more skyglow and no more complaints from the neighbors.

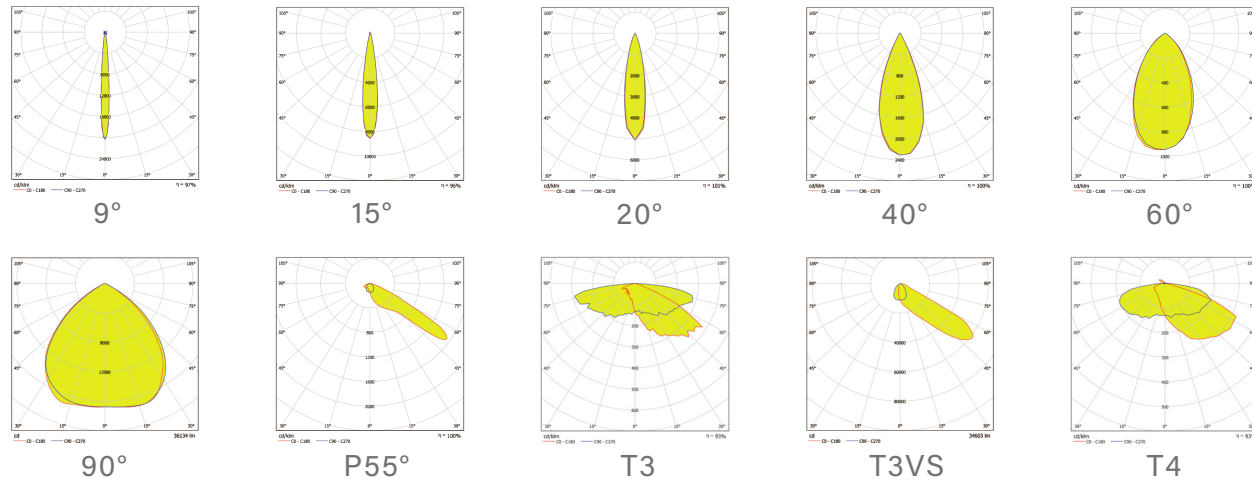

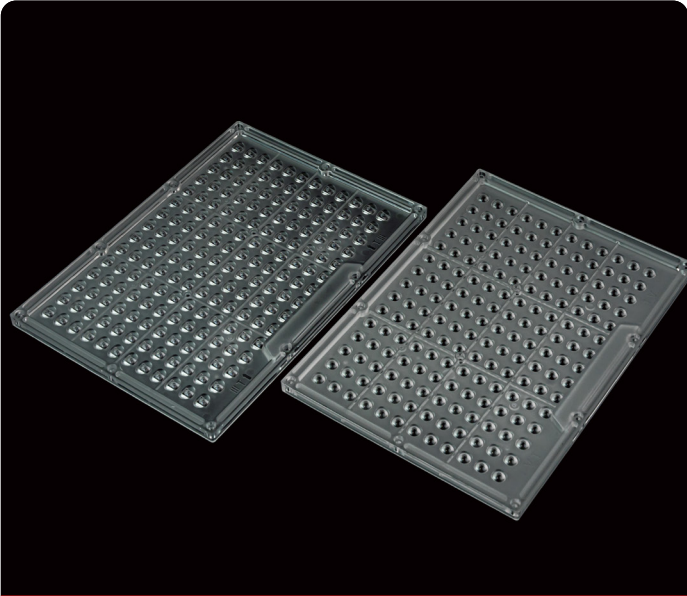

180 LED LENS IP66 260X187MM
PC | 2835 / 3030LED

MODEL	BEAM ANGLE
AJST260D180LEDT3	T3
AJST260D180LEDT4	T4
AJST260D180LEDT5	T5

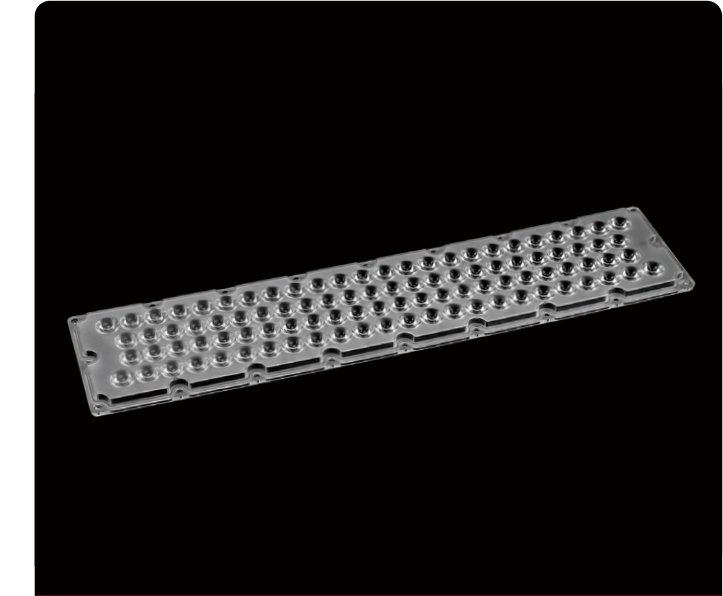

96 LED LENS IP66 520MM
PC | 3535 / 5050LED

MODEL	BEAM ANGLE
ARHB520D96LED20G	20°
ARHB520D96LED40G	40°
ARHB520D96LED60G	60°
ARHB520D96LED90G	90°
ARHB520D96LEDT3VS	T3VS



HIGH BAY LIGHT LENS

COMPATIBILITY


Up to size of “2835” “3030” LEDs package

APPLICATION:

Commercial and Industrial applications, such as warehouses and retail stores with larger areas and taller ceilings.
IP66 gasket water-proof UFO design


FEATURE:

The new version of UFO high bay light focuses on efficiency at a lower cost, The precision-engineered Asahi Optics design has optimized to the narrowest size of the UFO diameter, higher light intensity, Anti-glare, dual color LEDs uniformity

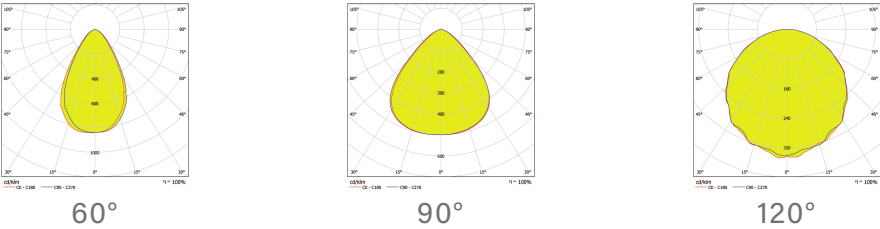

UFO LENS-293MM
PC | 2835 / 3030LED


MODEL	BEAM ANGLE
AJHB293D11RT60G	60/90°
AJHB293D8RT60G-Sensor	60/90°
AJHB293D4RT60G-GY	60/90°

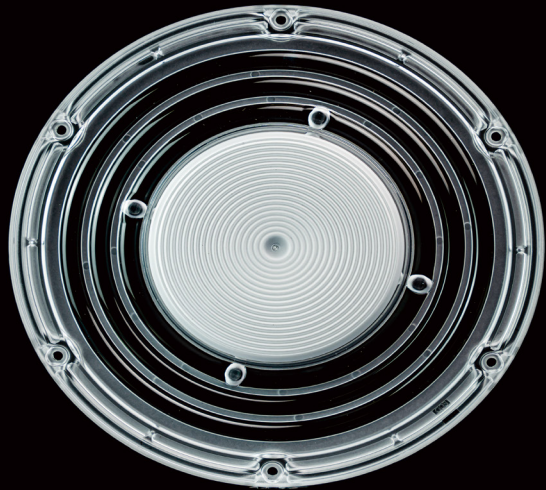

UFO LENS 184MM

PC | 2835 / 3030LED

MODEL	BEAM ANGLE
AJHB184D6RT60G	60/90/120°
AJHB184D3RT60G-SENSOR	60/90/120°
AJHB184D3RT60G-GY	60/90/120°

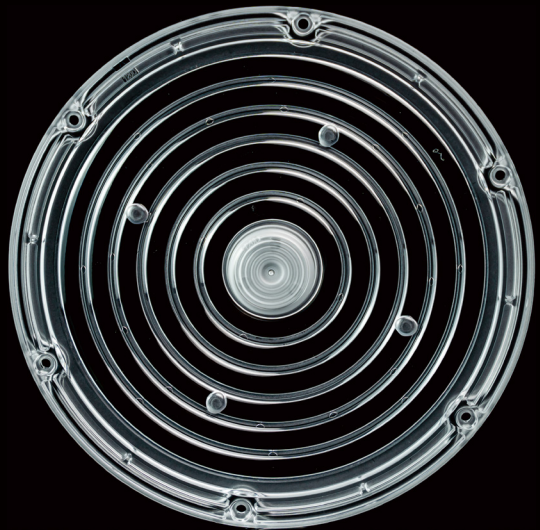

UFO LENS 208MM

PC | 2835 / 3030LED

MODEL	BEAM ANGLE
AJHB208D06T60G	60/90°
AJHB208D4RT90G-SENSOR	90°
AJHB208D4RT60G-GY	90/120°



UFO LENS-226MM

PC | 2835 / 3030LED

MODEL	BEAM ANGLE
AJHB226D7RT60G	60/90/120°
AJHB226D4RT60G-SENSOR	60/90/120°
AJHB226D4RT60G-GY	60/90/120°



UFO LENS-265MM

PC | 2835 / 3030LED

MODEL	BEAM ANGLE
AJHB265D8RT60G	60/90/120°
AJHB265D5RT60G-SENSOR	60/90/120°
AJHB265D5RT60G-GY	60/90/120°

CANOPY LIGHT LENS

COMPATIBILITY


Up to size of 2835"3030" LEDs package

APPLICATION:

Gas station Canopy Lights, Warehouse lighting
Other Industrial area lighting.

FEATURE:

The precision- engineered optics with anti-glare uniformity
Durable polycarbonate lenses, and bright, powerful illumination
The optics for Canopy lights are made specifically for this type of environment

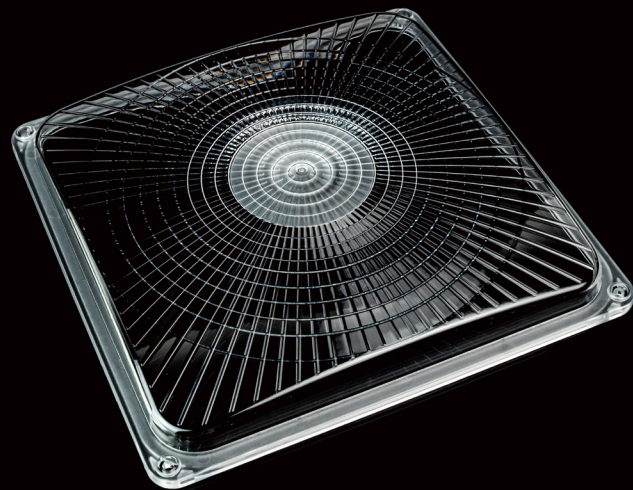

Canopy Cover-236MM


PC | 2835 / 3030 / 5050LED

MODEL

BEAM ANGLE

ACN236DWM-SQUARE

DLC-236MM

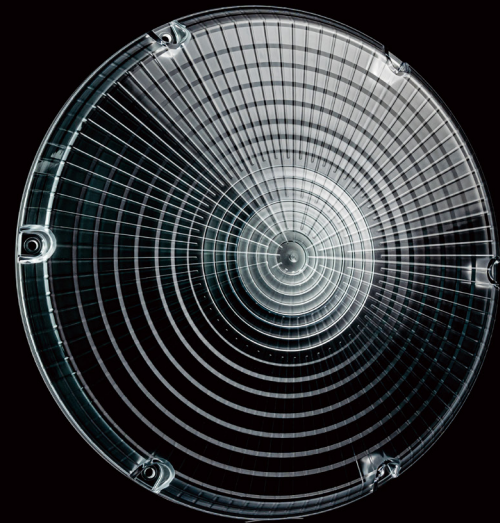

Canopy Cover-272MM


PC | 2835 / 3030 / 5050LED

MODEL


BEAM ANGLE

ACN272DWM-ROUND


DLC-272MM



DLC-236mm



DLC-F-272mm



DLC-G-278/353mm



ARCHITECTURE LIGHT LENS

COMPATIBILITY


■ Up to size of "3030" "3535" "5050" LEDs package

APPLICATION:


■ Whether your Landscape Architecture lighting goal is to accentuate a key feature, make a dramatic statement, or provide safety and security to guests, let Asahi Optics light up your project.

FEATURE:


■ The precision-engineered optics for Color-changing, high-intensity, and dimmable solid color LED fixture. The single-lens series offers seamless LED configuration easy installation, is dimmable, and is available with full color-changing capabilities.




8°




10°




13°




15°




25°




10x60°




15x30°



30°



60°




80°




15x45°



15x60°




30x60°




30x65°



40°



45°

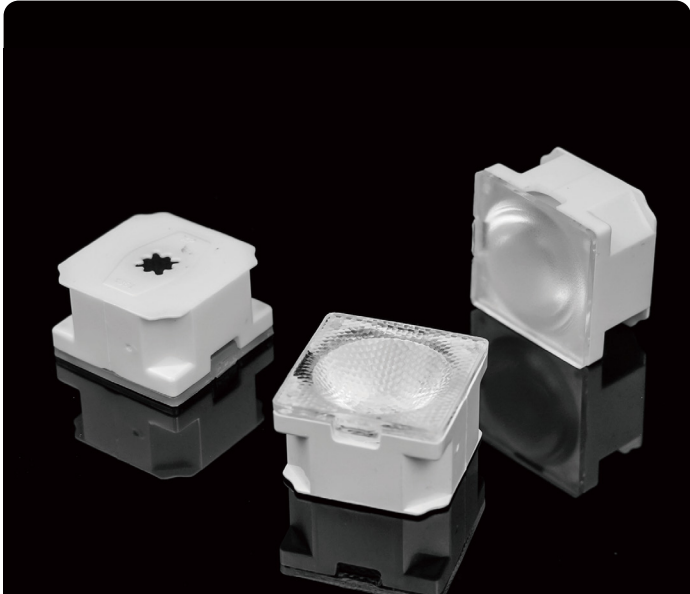

AY Series LENS 22MM
PMMA+PC | 3535LED

MODEL	BEAM ANGLE
AY22D13H8G	8°
AY22D13H15G	15°
AY22D13H30G	30°
AY22D13H45G	45°




AX Series LENS 22MM
PMMA+PC | 3535LED

MODEL	BEAM ANGLE
AX22D9H10G	10°
AX22D9H15G	25°
AX22D9H3065G	30x65°
AX22D9H25G	40°
AX22D9H30G	60°



AW SERIES LENS 22MM
PMMA | 3030 / 3535 /5050LED

MODEL	BEAM ANGLE
AW22D13H15G	15°
AW22D13H1530G	15x30°
AW22D13H1545G	15x45°
AW22D13H1560G	15x60°
AW22D13H24G	24°
AW22D13H30G	30°
AW22D13H40G	40°
AW22D13H60G	60°

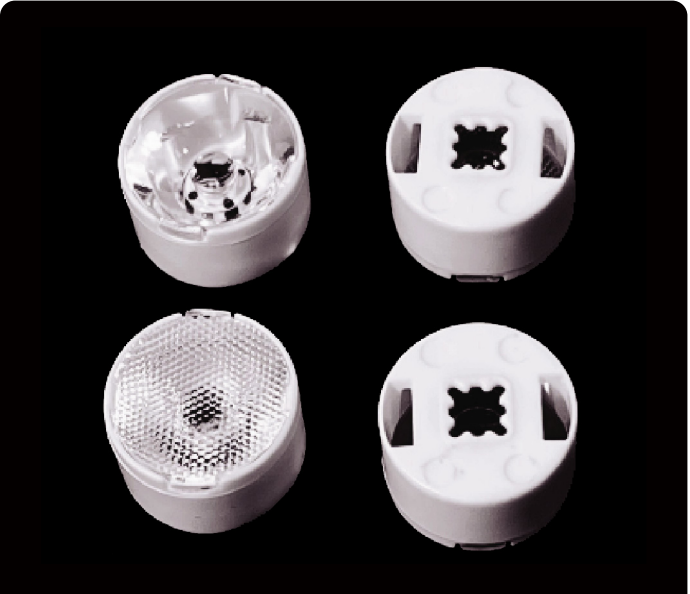

AT SERIES LENS 16MM
PMMA+PC | 3535LED

MODEL	BEAM ANGLE
AT16D9H13G	13°
AT16D9H1535G	15x35°
AT16D9H30G	30°
AT16D9H60G	60°
AT16D9H75G	75°



AF Series LENS 21MM
PMMA+PC | 3535LED

MODEL	BEAM ANGLE
AF21D12H10G	10°
AF21D12H1060G	10X60°
AF21D12H15G	15°
AF21D12H25G	25°
AF21D12H30G	30°
AF21D12H3060G	30X60°
AF21D12H40G	40°
AF21D12H60G	60°
AF21D12H80G	80°




AN SERIES LENS 10MM
PMMA+PC | 3535LED

MODEL	BEAM ANGLE
AN10D7H1060G	10X60°
AN10D7H15G	15°
AN10D7H25G	30°
AN10D7H40G	40°




AL SERIES LENS 21MM
PMMA | 3535LED

MODEL	BEAM ANGLE
ALS21D10G	10°
ALS21D15x55G	15x55°
ALS21D30G	30°

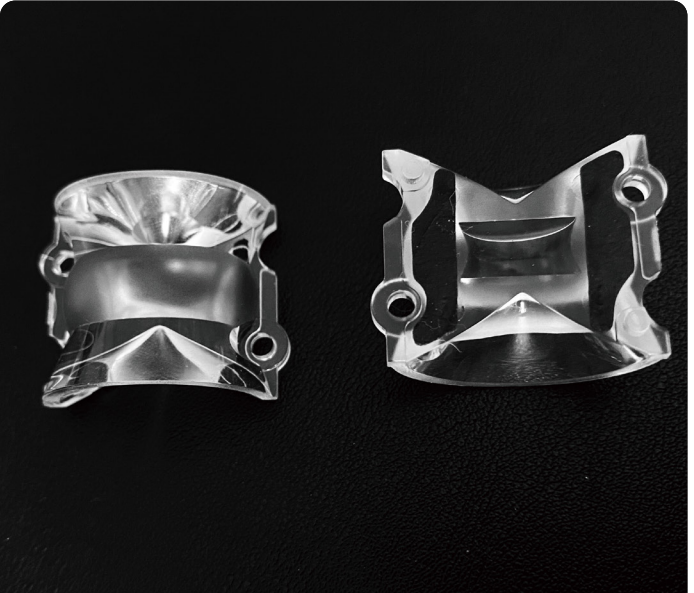


AB SERIES LENS 26MM
PMMA | 3535LED

MODEL	BEAM ANGLE
ALS26D3535LED10X100G	10X110°
ALS26D3535LED20X90G	20X90°

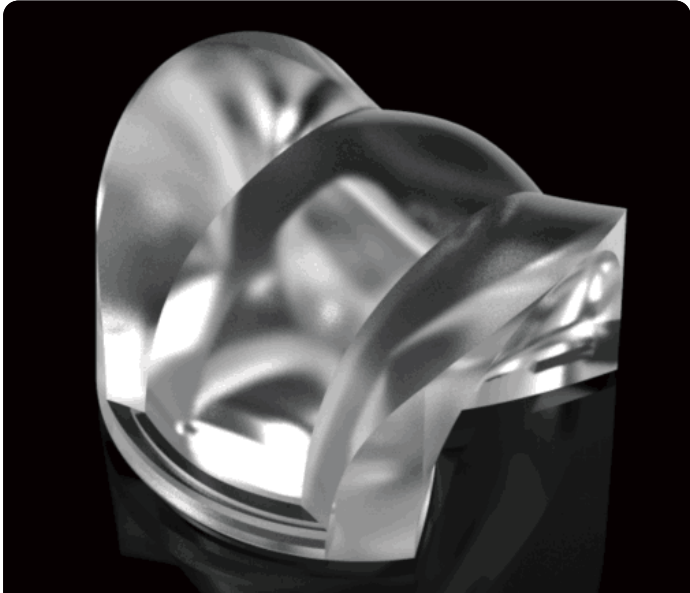

AFL SERIES LENS 16MM
PMMA | XPG-4 / 3535LED

MODEL	BEAM ANGLE
AFL16D9H20X100G	20X100°

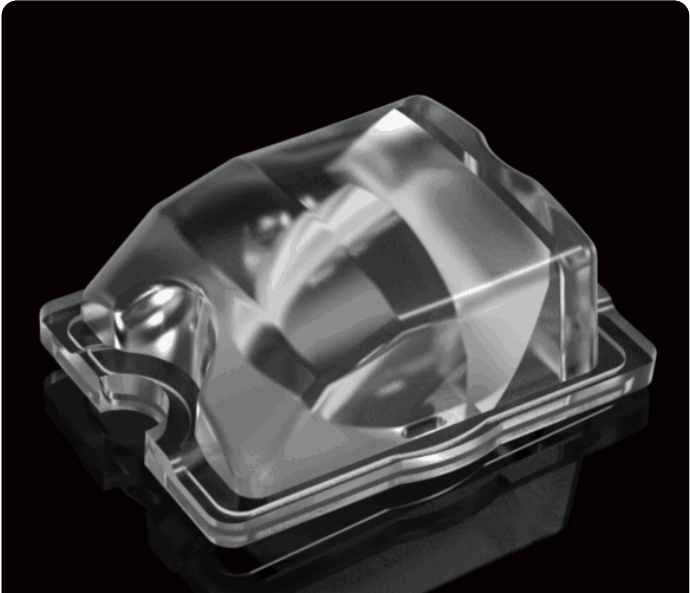

AST SERIES LENS 20MM
PMMA | XP-G / XP-E / 3535LED

MODEL	BEAM ANGLE
AST20DT134G	134°
AST20DT3VS	TYPEIII-VS




AE SERIES LENS 10MM
PMMA | XP-G / 3535LED

MODEL	BEAM ANGLE
A10D6H170G	170°



AVE SERIES LENS 13.9MM
PMMA | XP-G / CREE /3535LED

MODEL	BEAM ANGLE
AVE14D9H17G	17°
AVE14D9H1550G	15x50°

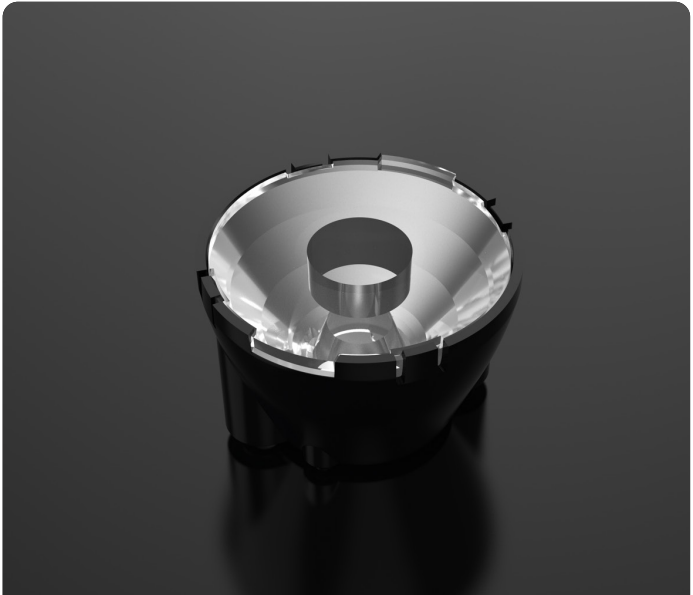

SURGICAL LIGHT LENS 5°
PMMA | 3535LED

MODEL	BEAM ANGLE
ASH38D24H5D	5°



AJ SERIES SINGLE LENS 35MM
PMMA | XPG-2/ XPG-3/ XPE2/ XML/ 3535LED

MODEL	BEAM ANGLE
AJSL35D22H3.8G	3.8°
AJSL35D22H4G	4°
AJSL35D22H6G	6°
AJSL35D22H15G	15°



LINEAR LIGHT LENS

COMPATIBILITY



■ "2835" "3030" LEDs package


APPLICATION:

■ Suspended linear lighting, Recessed linear lighting for office, school, retail shops, and other commercial area.

FEATURE:


■ ZHAGA-standard modules
The high efficiency and anti-glare UGR control which creates a comfortable work, learning, and shopping ambience.
The linear lenses adopts a snap-on type, which makes the assembly of the luminaire more simple and easy

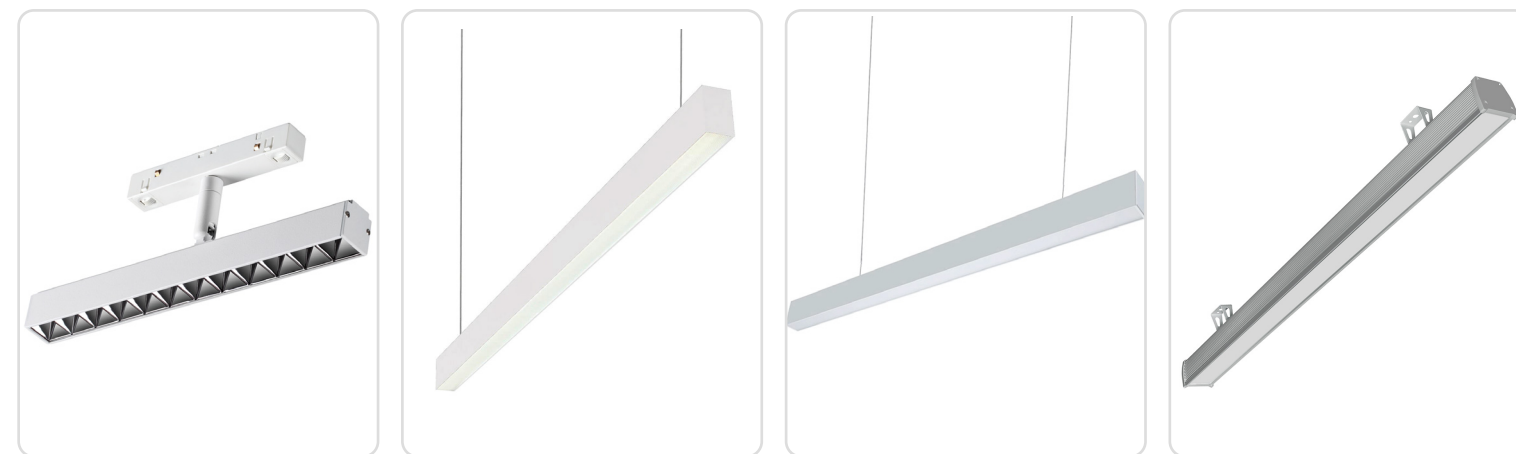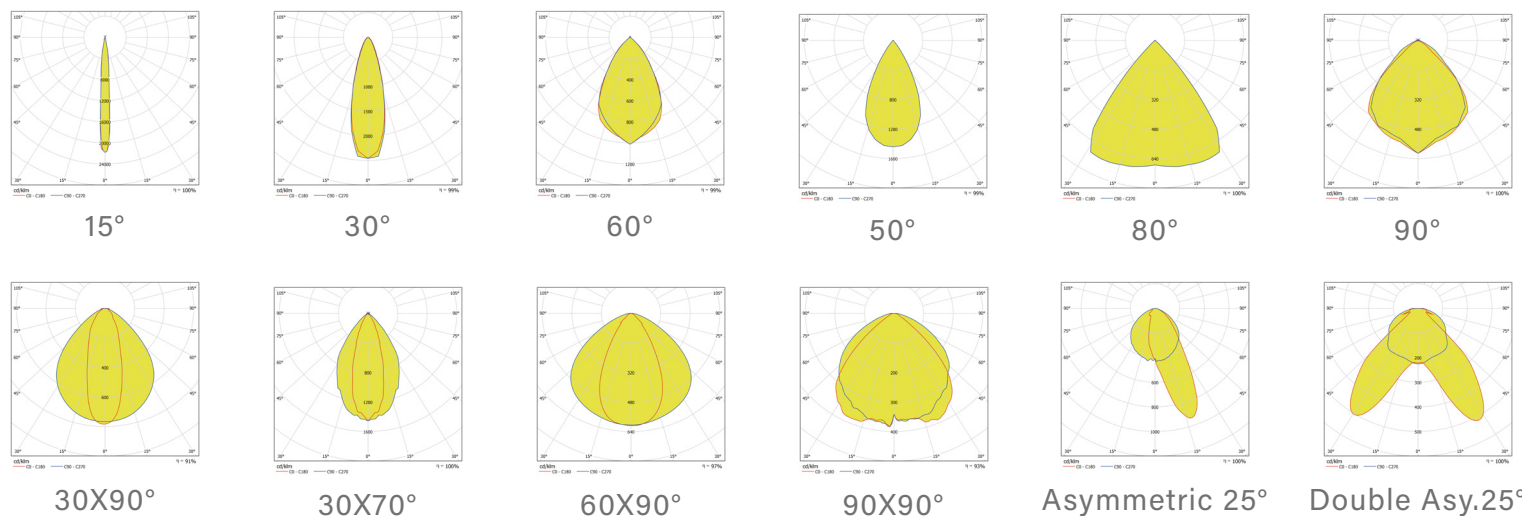

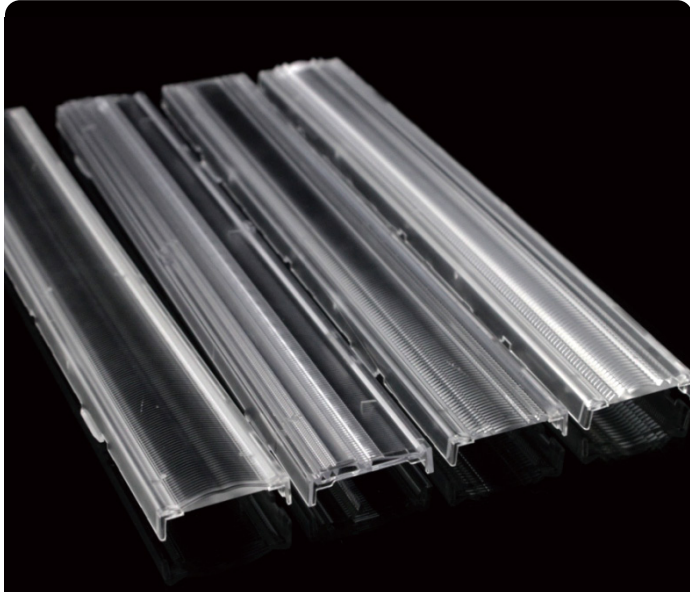

280MM zhaga standard
PMMA/PC | 2835 / 3030 / 5630LED

MODEL	BEAM ANGLE
ASL280D40HXXLEDA3090G	30x90°
ASL280D40HXXLED60G	60°
ASL280D40HXXLED90G	90°
ASL280D40HXXLEDA25G	Asymmetric 25°
ASL280D40HXXLEDDA25G	Double Asymmetric 25°

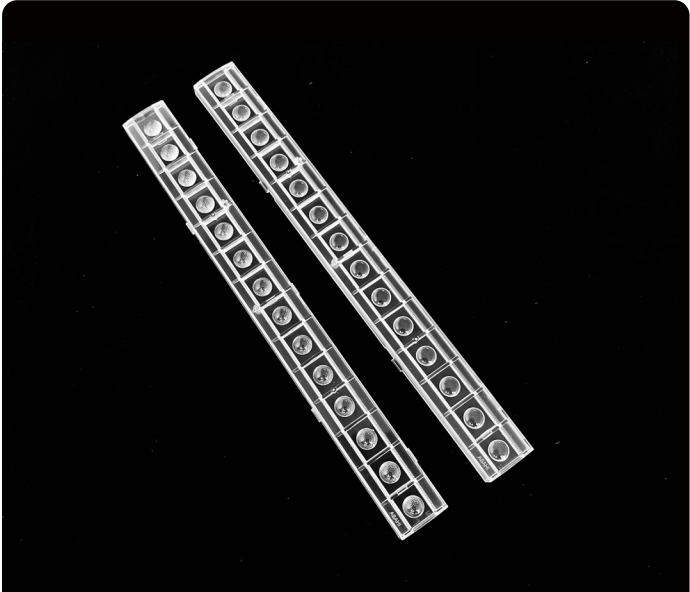


14LED LENS 30H 280MM
PMMA/PC | 2835 / 3030LED

MODEL	BEAM ANGLE
ASL280D30H14LED60G	60°
ASL280D30H14LED90G	90°




24 LED LENS 43H 280MM
PMMA | 2835 / 3030LED

MODEL	BEAM ANGLE
ASL280D43H24LED30G	30°
ASL280D43H24LED3070G	30X70°
ASL280D43H24LED60G	60°
ASL280D43H24LED90G	90°
ASL280D43H24LEDA25G	Asymmetric 25°
ASL280D43H24LEDDA25G	Double Asy.25°

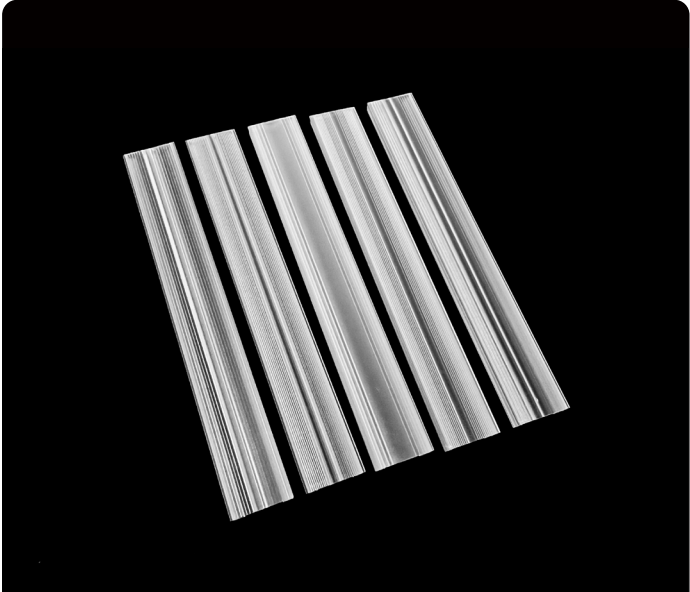

40MM WIDTH EXTRUDED LINEAR LENS
PMMA | 2835 / 3030LED


MODEL	BEAM ANGLE
ASL40H4086G	40X86°
ASL40H60110G	60X110°
ASL40H80100G	80X100°
ASL40HA25G	asymmetric 25°
ASL40HDA25	double asymmetric 25°

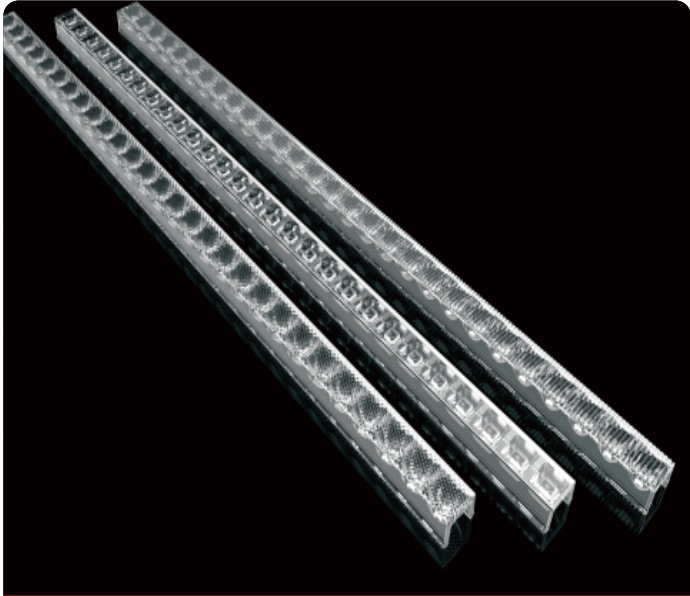

28 LED LENS 10H 280MM

PMMA | 2835 / 3030LED


MODEL	BEAM ANGLE
ASL280D10H28LED15G	15°
ASL280D10H28LED30G	30°
ASL280D10H28LED1560G	15x60°

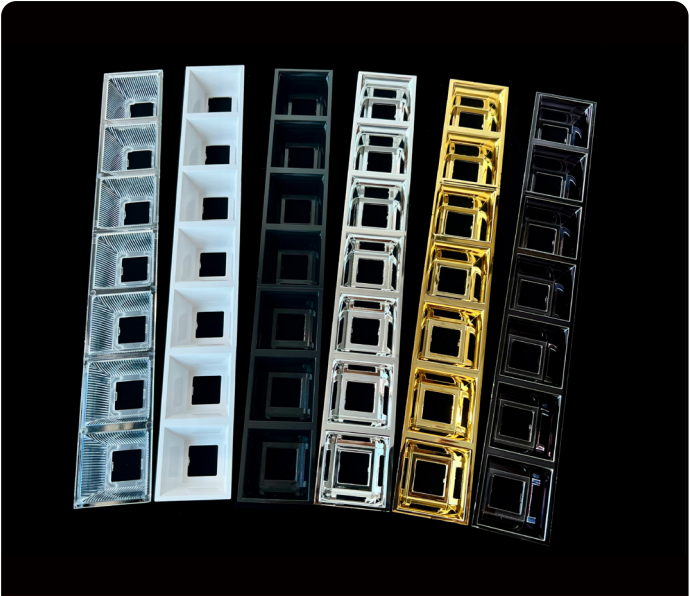

1X2 1X3 1X4 1X5 1X7 LIENAR LENS

PMMA+PC | 3030 / 5050/ 5630LED

MODEL	BEAM ANGLE
ASL80D40H2LED	30°/50°/80°/30X70°
ASL120D40H3LED	30°/50°/80°/30X70°
ASL160D40H4LED	30°/50°/80°/30X70°
ASL200D40H5LED	30°/50°/80°/30X70°
ASL280D40H7LED	30°/50°/80°/30X70°

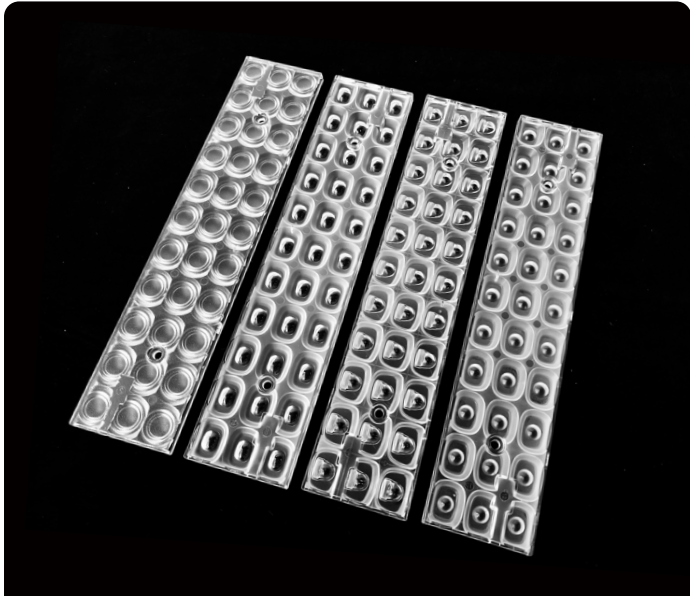

3X11 LINEAR LENS 286X61MM

PMMA | 2835 / 3030LED

MODEL	BEAM ANGLE
ASL280D61H33LED30G	30°
ASL280D61H33LED60G	60°
ASL280D61H33LED90G	90°
ASL280D61H33LED120G	120°
ASL280D61H33LEDDA30G	Asymmetric 30°
ASL280D61H33LEDA20G	Asymmetric 20°
ASL280D61H33LEDDA25G	Double asymmetric 25°



3X11 LINEAR LENS IP66 286X61MM

PC | 3030 / 5050 / 5630LED

MODEL	BEAM ANGLE
ALHB321D66LED3080GIP	30x80°
ALHB321D66LED60GIP	60°
ALHB321D66LED90GIP	90°



48 LED LENS 43H 560MM

PMMA | 2835 / 3030LED


MODEL	BEAM ANGLE
ASL560D43H48LEDP20G	P20°
ASL560D43H48LEDP3670G	36X70°
ASL560D43H48LED6090G	60x90°
ASL560D43H48LEDDA25G	Double Asymmetric 25°



56 LED LENS 65H 280MM

PMMA | 2835 / 3030 / 5050 / 5630LED

MODEL	BEAM ANGLE
ASL280D65H56LED30G	30°
ASL280D65H56LED60G	60°
ASL280D65H56LED90G	90°
ASL280D65HXXLED3090G	30*90°
ASL280D65HXXLED6090G	60*90°
ASL280D65HXXLED9090G	90*90°
ASL280D65HXXLEDA25G	Asymmetric 25°
ASL280D65HXXLEDDA25G	Double Asy.25°

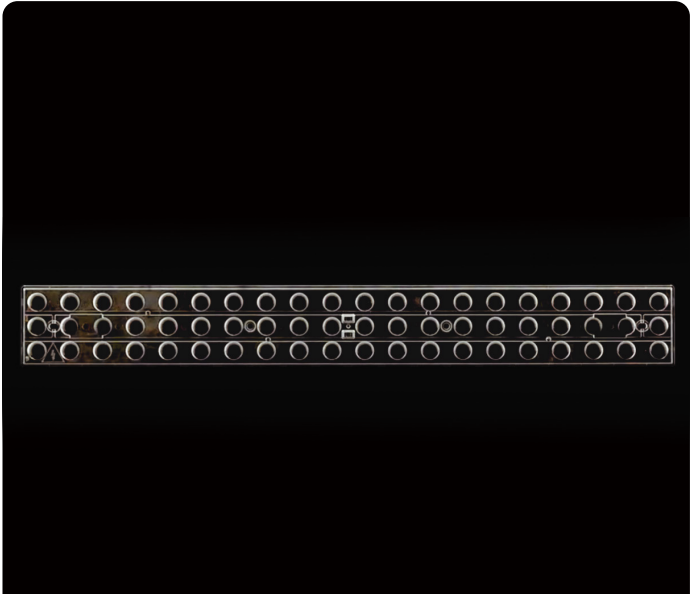

60 LED LENS 62H 500MM

PMMA | 2835 / 3030LED

MODEL	BEAM ANGLE
ASL500D62H60LEDT60G	60°
ASL500D62H60LEDT90G	90°