



Road Luminaire Photometric

Description

Luminary Name:		Lum. Catalog:	Test ID: 001
Lamp Name:		Lamp Catalog: LED LIGHT	Test Date: 2025-11-13 星期四
Manufacture:		Shld. Ang(°):	Test Machine:GON-2000
Test Lab: TEST		Frequency(Hz):	Lamp CCT(K): Ra:
Lum. Size(W*L*H):0.070m*0.173m*0.050m		Lum. Area(m2):0.021	Lum. W(kg): 0.010
Test System: C, γ	Test Step: C=22.5 γ=1.0	Temp.(°C): 25	Humidity(%):

Character

Lamp Speciality	Luminaire Speciality	
Rated Flux(lm): 5500.000	Luminary Flux(lm): 5500.000	Down Lumens&Percent: 5358.853lm 97.43%
Rated Power(W):	Luminary Efficiency: 100.00%	Up Lumens&Percent: 141.147lm 2.57%
Rated Voltage(V):	Luminary EER(lm/W): 160.070	76° Flash Area(m2):
Tested Power(W): 34.360	Max.Candela(cd): 2323.242	SLI: 0.000
Lamps' Inside: 1	Max Cand@Ang.(°): C=0.0 γ=70.0	IES Classification: Type II
Tested Electrics(V, A, pf):33.0, 1.042, 0.000	Half Peak Angle(°): L=-76.5, R=78.0	Longitudinal Classfct: Medium
Lamp Size(W*L*H):0.070m*0.173m*0.050m	Field Angle(10%Imax): 165.3(°)	Cutoff Classification: Cutoff

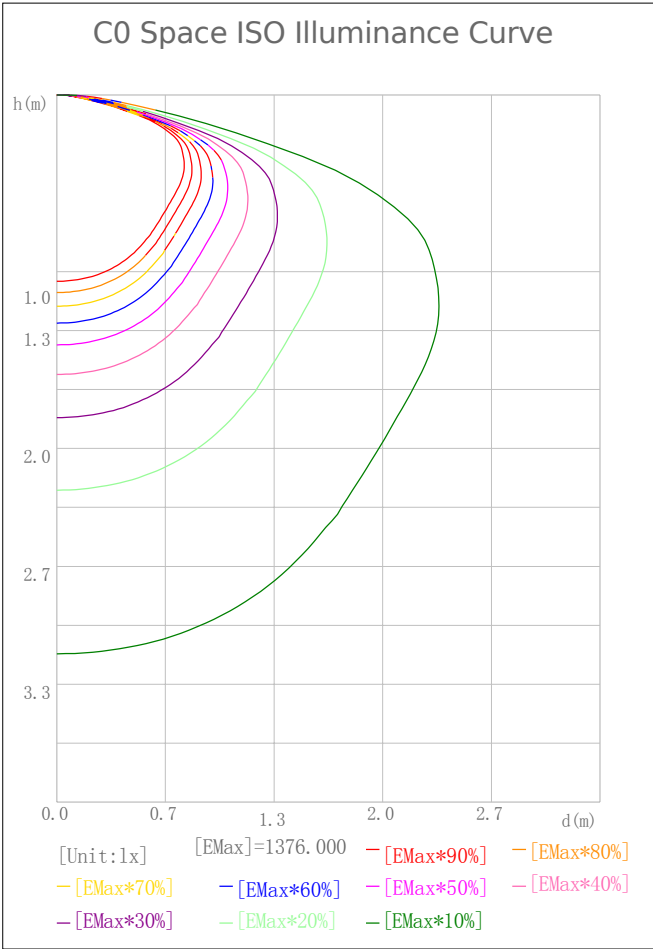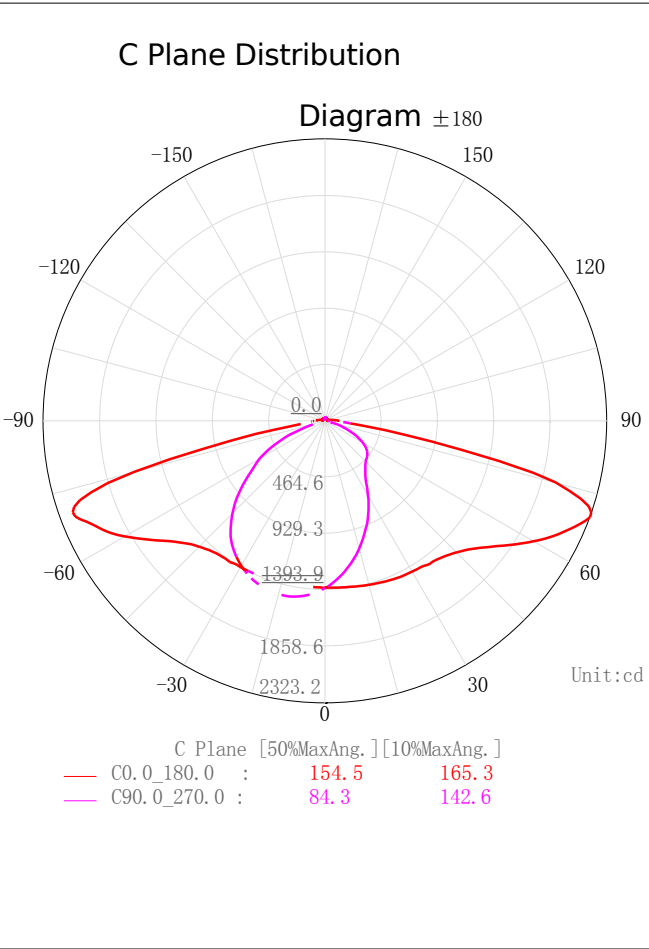

2D Plane Light Intensity Distribution Curve

Lum. Name:DA-B1200250	Lum. Catelog:	Test ID:001
Lamp Name:	Lamp Catelog:LED LIGHT	Test Lab:TEST
Manufacture:	Test Machine:GON-2000	Test Date:2025-11-13 星期四

