
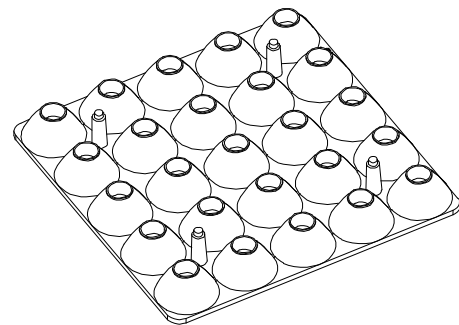


The surface is frosted

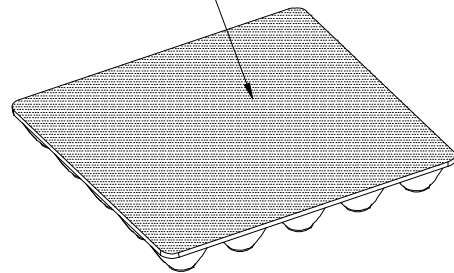

NOTE:

1. The surface of the lens should be smooth without scratches, bubbles, dents and black spots.

GENERAL TOL ERANCES ISO2768-M (UNLESS STATED)	MATERIAL	MATERIAL	DRAWING TITLE
LINEAR	$0.5 < X \leq 3.0 \pm 0.1$	$3.0 < X \leq 6.0 \pm 0.1$	$6.0 < X \leq 30.0 \pm 0.2$
ANGULAR	$0^\circ < X \leq 10^\circ \pm 1'$	$10^\circ < X \leq 50^\circ \pm 30'$	$50^\circ < X \leq 120^\circ \pm 20'$