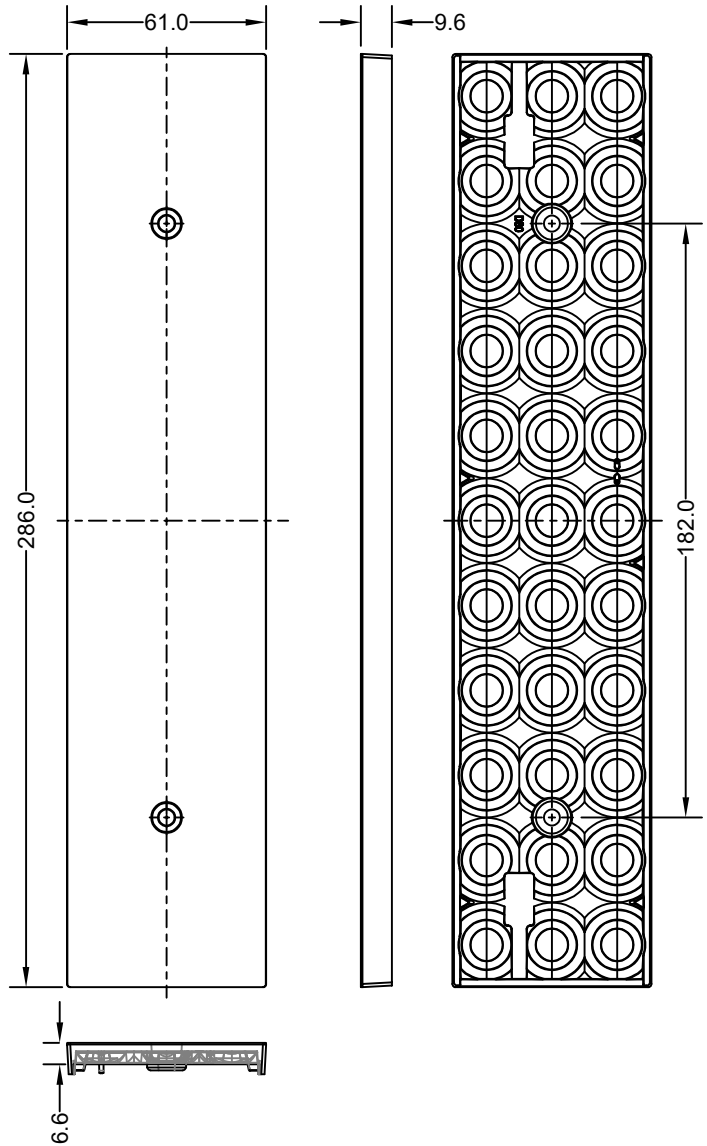

Technical remark:
1.Fillet and inclination not indicated according to 3D drawing.
2.Dimensional tolerances not indicated are shown in the right list.
3.The surface has no flash, shrinkage, bubbles and other defects.
*4.When the lamp adopts rubber ring for waterproofing: the roughness of the contact
surface between the radiator and the rubber ring is required: Ra<3.2μm

CHANGE						PART	
						0 ~ 10	±0.05
						10 ~ 20	±0.10
						20 ~ 30	±0.15
	A/0	2026-1-30	NEW	——	——	30 ~ 40	±0.20
						Angie	± 1°
	版次 REV	日期 DATE	变 更 说 明 MODIFICATION DESCRIPTION	变 更 CHANGE	核 准 APPROVE	DIM	TOL

颜 色 COLOR	Transparency		SOALE	1:1	ASAHI ASAHI OPTICS LIMITED
材 质 MATERIAL	PMMA		UNIT	mm	
设 计 DESIGN	ZJL	2026-1-30	SIZE	A4	料号 PART NO:
核 准 APPROVE			SHEET		品名 Product: ASL286D61H33LED60G